Communication in team

Product Configuration

SYSTEM DIMENSIONS bizhub C252

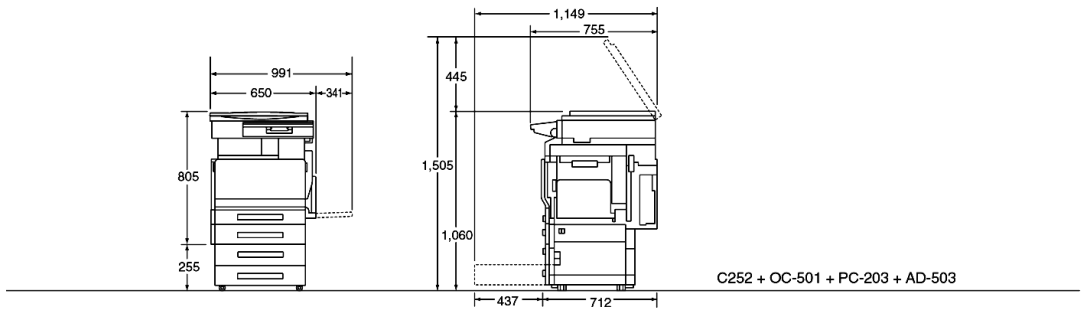

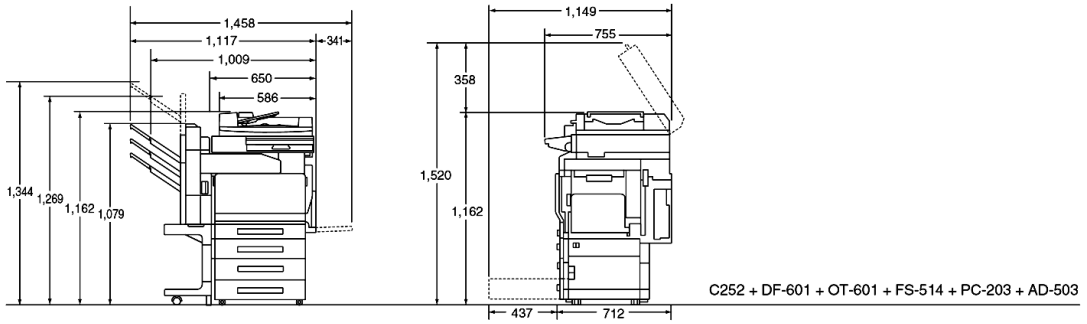

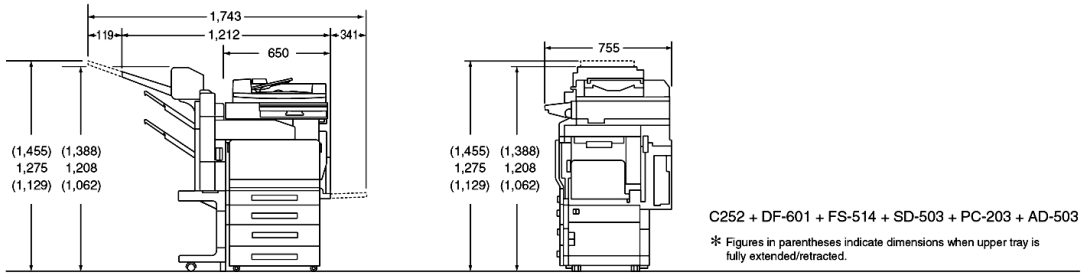

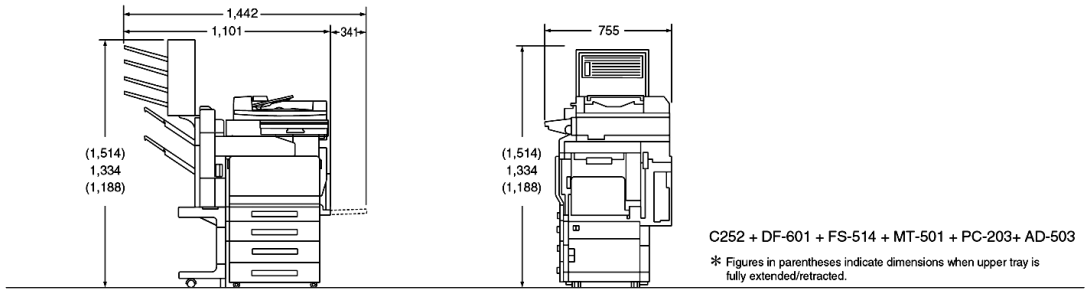

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

SYSTEM DIMENSIONS bizhub C252P

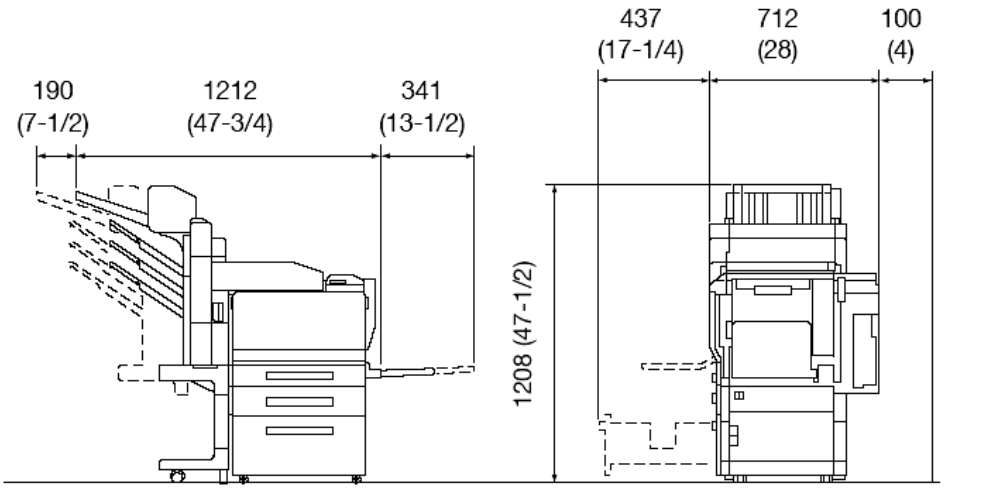

C252P+FS-514+PC-403+SD-503+OT-601

Unit: mm (inch)

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

SYSTEM CONFIGURATION

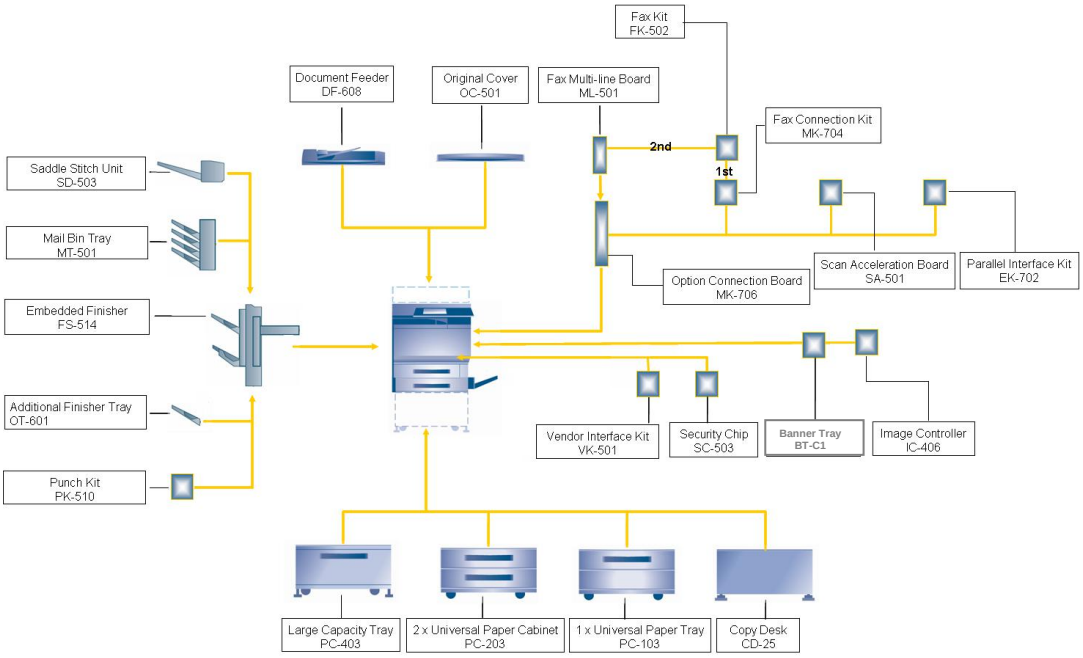

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

System Specifications

Original Feeder DF-601	Option
Original Size	A5 length wise – A3
Original Weight	35 – 210 g/m² single sided 50 – 210 g/m² double sided or mixed media
Tray Capacity	100 sheets (80g/m² A4) 38 sheets (210g/m² A4)
Feeding Type	1st page system
Feeding Speed	25 opm
Dimensions (WxDxH) mm	588 x 519 x 135
Weight (kg)	14
Original Cover OC-501	**Option**
Remark	Required, if no document feeder is installed
Paper Cassette MPT	**Std**
Capacity	250 sheets
Paper Format	A6 (Thick), A5 – A3FB+ (311 x 457mm), customized
Paper Weight	64 – 256 g/m²
Media Types	All
Paper Cassette Universal	**Std**
Capacity	500 sheets
Paper Format	A5 – A3
Paper Weight	64 – 90 g/m²
Media Types	Plain
Manual Bypass	**Std**
Capacity	100 sheets
Paper Format	A6 (Thick), A5 – A3FB+ (311 x 457mm), customized
Paper Weight	64 – 256 g/m²
Media Types	All

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Banner Tray BT-C1	Option
Function	To extend the manual feed table for the use of Banner Paper
Capacity	100 sheets (max. 297 x 1200 mm)

Large Capacity Cassette PC-403	Option
Capacity	2500 sheets
Paper Format	A4
Paper Weight	60 – 90 g/m²
Media Types	Plain
Dimensions (W x D x H) mm	570 x 548 x 263
Weight (kg)	26

Universal Cassette PC-203	Option
Capacity	2x500 sheets
Paper Format	A5 – A3
Paper Weight	60– 90 g/m²
Media Types	Plain
Dimensions (W x D x H) mm	570 x 548 x 263
Weight (kg)	26

Universal Cassette PC-103	Option
Capacity	500 sheets + paper storage
Paper Format	A5 – A3
Paper Weight	60 – 90 g/m²
Media Types	Plain
Dimensions (W x D x H) mm	570 x 548 x 263
Weight (kg)	22

Copier Desk CD-25	Option
Function	Storage

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Automatic Duplex AD-503	Std
Capacity	Stackless
Paper Format	A5 – A3FB+ (311 x 457mm)
Paper Weight	64 – 256 g/m²
Media Types	Plain Paper, Thick 1,2,3
Embedded Finisher FS-514	**Option**
General Paper Weight	50 – 256 g/m²
Finishing Modes	Non-sort, sort, group, sort & offset, group & offset, staple
Tray Capacity	Upper tray: 200 sheets (A4/80 g/m²) Lower tray: 1000 sheets (A4/80 g/m²)
Stapling Modes	Corner stapling, two position stapling
Stapling Capacity	50 sheets
Stapling Format	Corner 30 degrees (back, front), Corner Parallel (back, front), Parallel 2 points
Dimensions (W x D x H) mm	352 x 558 x 573
Weight (kg)	33.2
Remark	1 staple cartridge SK-602 is included For more details in regard to the capacity refer to the chapter ”Appendix”
Additional Finisher Tray OT-601	**Option**
Bin Capacity	200 sheets
Remark	For more details in regard to the capacity refer to the chapter ”Appendix”
Mail Bin Tray MT-501	**Option**
Number of Bins	4
Bin Capacity	125 sheets each
Dimensions (W x D x H) mm	340 x 509 x 387
Weight (kg)	8
Remark	Either Mail Bin Tray or Saddle Stitch Unit can be installed to FS-514

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Saddle Stitch Unit SD-503	Option
Folding	Crease fold
Paper Size	A4 lengthwise/A3
Paper Weight	60 – 209 g/m²
Tray Capacity	200 sheets or 20 sets
Stapling Modes	Centre parallel 2 points
Stapling Capacity	2 – 15 sheets
Dimensions (W x D x H) mm	Inside the transport section: 48 x 399 x 121 Staple Unit and Output Tray: 576 x 281 x 478
Weight (kg)	9.3 (inner and outer part together)
Remark	1 staple cartridge MS-2C is included in the kit Either Saddle Stitch Unit or Mail Bin Tray can be installed to FS-514

Punch Kit PK-510	Option
Number of Holes	4
Paper Size	A5 – A3
Paper Weight	50 – 209 g/m²
Dimensions (W x D x H) mm	114 x 461 x 136
Weight (kg)	1.9

Copier Hard Disk HD-501	Std
Capacity	40GB
Type	IDE, Laptop type (2,5 inch)
Functionality	Document Memory, Scan to HDD, Box function
Remark	Standard for C252, optional for C252P

Security Chip SC-503	Option
Function	Memory Data Encryption

Option Connection Board MK-706	Option
Function	Connection board for Scan Accelerator, Fax, 2nd Fax and IEEE1284 & USB extension

Scan Accelerator Board SA-501	**Option**
Function	Faster Scan Processing, Multipage PDF rerouting, Scan file printing from box
IEEE1284 & USB Connection Board EK-702	**Option**
Function	Additional parallel and USB interface for embedded print/scan controller
Remark	Either Parallel or USB can be utilised
Fax Board FK-502	**Option**
Function	Super G3 Fax board
Remark	Requires MK-706 + MK-704 and/or ML-501
Fax Connection Board MK-704	**Option**
Function	Interface Board for Fax board FK-502 / containing backup memory and battery
2nd Fax Connection Board ML-501	**Option**
Function	Interface Board for 2nd Fax board FK-502
Option Connection Board MK-706	**Option**
Function	Required to mount FK-502 and EK-702
Vendor I/F Kit VK-501	**Option**
Function	Connection Interface for Coin/Card vendor devices

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Copier Specifications

Copy speed		
	B&W / Color A4 crosswise	25 / 25c/ppm
	B&W / Color A4 lengthwise	16 / 16c/ppm
	Bi-Color A4	25c/ppm
	B&W / Color Duplex A4 crosswise	23 / 23c/ppm
	B&W / Color Duplex A3	8 / 8cppm
	Color A3	13c/ppm
	BW A3	13c/ppm
First copy		
	Color A4	11.7 sec
	BW A4	8.4 sec
Multi Copy		1 – 999
Warm up time		Less than 110 sec
Resolution	Copy	600 x 600 dpi
	Print	1800 equivalent x 600 dpi
	Scan	600 x 600 dpi
	Fax	600 x 600 dpi
Gradation		256
Exposure Type		4 dualbeam laser
Copier RAM		1024MB std / max (512 MB Work Memory + 512 MB File/Image Memory, Fax Memory is extra)
Paper Format		A5 – A3FB+ (311 x 457mm) + customised sizes
Paper Weight		64 – 256 g/m²
Printable Area max		305 x 449 mm
Image Loss		Max. 4.0 mm for top/bottom edges Max. 3 mm for right/left edges
Power Requirements		220 – 240V, 50/60Hz

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Spare Parts
Maintenance
Recommended Media
Appendix

Power Consumption	Less than 1.5KW
Noise Level	Stand By = 37dBA Action = 68 dBA
Dimensions (W x D x H) mm	650 x 755 x 771
Weight (kg)	94 kg MFP (w/scanner, MPT, MFT, 500 sh. Cassette) 76 kg Printer (w/MPT, MFT, 500 sh. Cassette)
Copier Functionality	
Auto Original Detection	Color / BW
Auto Size Detection	Yes
Auto Tray Selection	Yes
Auto Tray Switch	Yes
Magnification	
Zoom range	25 – 400%
Zoom Preset	Yes
Zoom Program	Yes
XY Zoom	Yes
Color Modes	Auto Color ACS Full Color BW 2-Color Single Color / 21 colors
Exposure Modes	Text Mode Text Photo Mode (Printed Photo / Photo Paper) Photo Mode (Printed Photo / Photo Paper) Special Original (Map / Dot Matrix / Copied Paper) Text Enhancement

Exposure Modes	Gradation / Resolution
	Glossy
Creative Functions	Sheet / Cover / Chapter Insertation
	Book Copy
	Poster Mode (Multipage Enlargement)
	Image Repeat
	Mirroring
	Negative / Positive
	Background Colour
	Color Adjustment
	Booklet Pagination
	Page Margin / Page Erase
	Stamp – Time/ Date, Page, Set
Special Function	Copy and save in User Box
	Booklet Fold Staple Center Erase (10mm erase)
	Separate Scan (for more than 100 org.)
	Page Combination 2/4/8 in 1
Box	
No. of Boxes	1000
Documents per box	Max. 200
Total pages (all boxes)	Max. 9000
Total documents (all boxes)	Max. 3000
Password	8 digit (alphanumeric)
Functions	Reprint saved jobs
	Proof print saved jobs

Box cont.	Move to Box (other user box) Copy to Box (other user box) Edit File Name Combine Jobs (Copy/Print) Route Jobs (Email / FTP / FAX / SMB) Route Jobs File Type selection (JPG / TIF / PDF*) * PDF multipage color routing requires Scan Acceleration board
EKC / Authentication	
No of Accounts / Users	999 + 1 public user
User Name	8 digit (alphanumeric)
Password	8 digit (alphanumeric)
User Storage	Offline on MFP, Online by Windows Active Directory
Permission set	Color / BW Copy / Print / Scan / Fax / Box
Volume Limitation	Color / BW By User or Group
Setup Software	PS Data Administrator
Special function	User List display Password Only function Password free Public User
Counter	
Copy	BW / Full Color / Single Color / 2 Color - Total / Large
Print	BW / Full Color / 2 Color - Total / Large
Scan	Total / Large
Fax	Income / Outcome
Othres	Number of originals / Numbers of print / Duplex
Toner Coverage	Cyan / Magenta / Yellow / Black / pure Black

Printer Specification Emperon Controller

Hardware	
Type	Embedded
CPU	PPC750 FX @ 466MHz / IBM G4 64bit
Memory	1024MB
Harddisk	40GB (shared copier HDD)
Interface	
Ethernet	10/100 Base-T
TokenRing	No
Parallel	Yes with optional EK-702
USB	Yes USB2.0 with optional EK-702
Driver	
PostScript	PS3 Emulation
	Win98SE, ME, NT.40, 2K, XP, 2003 Mac OS 9.x / 10.x or higher
PCL	PCL 5C / PCL6
	Win98SE, ME, NT.40, 2K, XP, 2003
Network	
Frame Typ	Ethernet 802.3 Ethernet 802.3 Ethernet II Ethernet SNAP
Protocols	TCP/IP IPX/SPX NetBEUI Apple Talk (Ethertalk)
Auto Port Switching	No
IPP	Yes
Terminal Server	Windows NT4.0, 2000, 2003
Point and Print	Yes
Click and Print	Yes

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Network cont.	
Port 9100	Yes
LPR printing	Yes
Print Functions	Paper Type / Size / Source selection
	Output Tray selection
	Output Method (Print / Secure Print / Save in Box / Save in Box and Print / Proof Print)
	Binding – Duplex (left, right, top) , Booklet
	Combine 2 / 4 / 6 / 9 / 16 in 1
	Page Margin
	Stapling (position), Punching
	Collate / Offset
	Mixed Media (only PCL)
	Front and Back Cover
	Chapter insertation (only PCL)
	Print Overlay + Create Overlay
	Watermark
	Quality Preset by document type (Document / Photo / DTP / WEB / CAD)
	Quality setting by user (Text / Photo / Graph)
Special Functions	Skip blank pages
	Authentication for EKC
	Authentication for Active Directory
	Easy Set
	Easy Set Network Sharing (only PS)
	PC Fax (only PCL6)

Scan Specifications

Type	1pass scan
Resolution	200, 300, 400, 600
Colour	8Bit RGB – 24Bit
Speed	25 opm (monochrome and color)
Format	Up to A3
File Format	JPEG, TIFF, PDF, Compact PDF (fullcolour only), Multipage PDF
Source	Platen, ADF
Scan Destinations	2100 (2040 single + 60groups) 300 Scan programs = Destination + Scan Setting
Scan Destinations	
Twain	Yes (only Windows)
Twain HDD	Pull from User Box
To eMail	Yes
To FTP	Yes
To Scan Box	Yes, User or Public
To i-Fax	Yes, with Fax board
To Fax	Yes, with Fax board
To PC	Yes, via SMB
Scan Settings	Single Sided / Double Sided Original Type (Text / Text Photo / Photo / Map / Dot Matrix / Copied Paper) Scan Size – Auto, DIN, Custom, Photo Colour – ACS, Full Colour, BW; Greyscale Background removal Book Scanning / Mixed Originals / Binding Page Erase

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Fax Specifications

GENERAL DATA	
Protocol	Group 3 (compliant to ITU-T T.30) F-Code communication
Min Transmission Time (seconds)	< 3 Sec. ITU-T V.34,JBIG (ITU No. 1)
Max. Modem Speed / Compatibility	33,6 kbps / ECM, Super G3
Coding / Error Correction (ECM)	MH, MR, MMR, JBIG
Modulation Method	V27ter, V29, (V33), V17, V8 and V34
Document Memory	32 MB (shared with scanner)
Memory Battery Buffered	60 hrs. (after 28 hrs. full charge) Life: charging and discharging 5.000 times
Dual Access (2 channels)	Yes
Dual Line	Yes (two FK-502 are required)
Remote Diagnostic	CS Remote Care via fax-line
Display / Error Indicator	Yes
DIALING	
Max. Numbers Stored	Abbreviated dial: 2000 One-touch dial: 400
Max. Phone Digits	38 digits
Program Keys	Yes, 400
Group Setting (max.)	Yes, 100 (max. 500 destinations)
Tone / Pulse Select	Yes / No
PSTN-access by No / Earth Key / Flash	Yes / No / Yes (default: off, service function)
Sub addressing	Yes
Auto Redial / Last Number Redial	Yes / Yes (possible to select from five latest histories)
Electronic Telephone Book Function	Yes
Monitor Speaker	Yes

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

TRANSMISSION / INPUT	
Transmission Resolution	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi
Effective Scanning Width	Max A3
Max. Size FBS (W x L)	216 x 356 mm
Halftones	Yes, 256
Number of Timers	max. 20
Storable TX Jobs	max. 99
ADF/Memory Transmission	Yes / Yes
Book Transmission	Yes
Header Line (TTI)	Yes
Stamp Function	No
Department Management	Yes
Closed Network TX / Protected TX	Yes / Yes
Quick Memory Transmission	Yes
Batch Transmission	Yes
2-to-1 Transmission	No
2-Sided Transmission	No
Cover Page Function	Yes [via PCL6 printer driver][
Max. Broadcasting Locations	230
Relay Broadcasting	Yes (using ITU subaddress function)
Relay Broadcast Command	Yes (using ITU subaddress function)

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

RECEIVING / OUTPUT	
Receiving Resolution	203 x 98 dpi, 203 x 196 dpi, 406 x 392 dpi
Effective Print Width (fax mode)	A4 (3±2 mm margin)
Smoothing	Yes, for 203 x 98 dpi only
Auto / Manual Reception	Yes / Yes
Storable RX Jobs	Max. 250
Reduction in Fax Mode	Yes
Paper source selection	Yes
Receiving / Output Tray Selection	No
Memory Receiving	Yes
Footer Print	Yes
Closed Network RX / Protected RX	No / Yes (block Junk Fax)
2 to 1 Receiving	Yes (A5/2 pages => A4/1 page)
Duplex Reception	Yes
RX-Memory Print by Password	Yes (Security reception)
Forward Function [Fax Gateway]	Yes [fax number, Box and to-eMail]
Max. Polling Locations	max. 230
Selective / Protected Polling	Yes (ITU subaddress) / yes (ITU subaddress)
Memory Polling (Database Polling)	Yes

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

REPORTS AND LISTS	
Telephone List	Yes
Key Setting List	Yes (Soft key: Included in Machine Setting List)
Transmission Report	Yes
Reception Result Report	Yes
Reservation Report	Yes (Command List)
Broadcast Report	Yes (Transmission Confirmation Report)
Error Report	Yes (Transmission Confirmation Report)
Machine Status List	Yes (Machine Setting List)
Journal	Yes
Consumable Order Report	Yes (default: off, service function)
Memory Data List / Print	Yes (Stored Document List)
User/Department Management List	Yes
UTILITIES	
PageScope Data Administrator	Yes [for programming fax receipient]
INTERNET FAX	
Communication Protocol	Transmission: SMTP Reception: POP3, TCP/IP
Communication Mode	Full mode
Original Size	A3, B4, A4
Recording Size	Max. A3 (Max. A3 long size original: 1000 mm with document feeder)
Interface	Ethernet 10Base-T/100Base-TX
Resolution	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi
Format	Transmission: TIFF-S Reception: TIFF-F
Server Software	Send mail Postfix Qmail the other server software

Note: Specification may vary due to national PTT regulations

Consumables

Toner	
Name	TN210
Type	Cartridge
Yield CMY	12k @ 5%
Yield K	20k @ 5%
Colour	C, M, Y, K
Imaging Unit	
Name	IU210
Type	Imaging Unit PC Drum + Starter
Yield CMY	45k
Yield K	70k
Colour	C, M, Y, K
Waste Toner Basket	
Yield	30 k prints
ITBU Image Transfer Belt Unit	
Yield	120 k prints
Fusing Unit	
Yield	120 k pints
Staple Cartridge for FS-514	
Type	SK-602
Capacity	3 x 5.000
Staple Cartridge for SD-503	
Type	MS-2C (MAXX)
Capacity	4 x 2.000

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Article Numbers

Machine/Accessories	Art. No	Compatibility
bizhub **C252**	4038 - 216	---
bizhub **C252P**	4038 - 206	---
Original Feeder **DF-601**	4582 - 811	bizhub C250
Original Cover **OC-501**	4599 - 321	bizhub C250/C300/C350/C352
Universal Cassette **PC-103**	4061 - 541	bizhub C250/P/ C300/C352
Universal Cassette **PC-203**	4061 - 441	bizhub C250/P/ C300/C352
Large Capacity Cassette **PC-403**	4061 - 741	bizhub C250/P/ C300/C352
Copier Desk **CD-25**	9960 – 7200 - 00	bizhub C250/P/C300/C352
Embedded Finisher **FS-514**	9J08 - 622	bizhub C250/P/C300/C352
Output Tray **OT-601**	4625 -241	FN-117, FS-508
Punch Kit **PK-510**	4512 – 715 (European) 4512 – 717 (Swedish)	bizhub C250/P/C300/C352
Mailbin Kit **MT-501**	4510 - 716	FN-117, FS-508
Saddle Stitch Unit **SD-503**	4511 - 715	FN-117, FS-508
Vendor Interface Kit **VK-501**	4599 - 235	bizhub C250/C300/C350/C351/ C352/C450
Option Connection Board **MK-706**	4599 - 473	bizhub C250/C300/C352
Scan Acceleration Board **SA-501**	4599 - 381	bizhub C250/C300/C351/C352/ C450
IEEE1284 & USB Interface Board **EK-702**	4599 - 372	bizhub C250/C300/C351/C352/ C450
Fax Board **FK-502**	15LE	bizhub 600/750/C250/C300/C351/ C352/C450
Fax Connection Board **MK-704**	4599 - 401	bizhub C250/C351/C450
2nd Fax Connection Board **ML-501**	4599 - 411	bizhub C250/C300/C351/C352/ C450
Security Chip **SC-503**	4599 - 441	bizhub C250/C300/C351/C352/ C450
HDD 40GB **HD-C250P/C352P**	9967-000-183	bizhub C250P/C352P

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Accessories cont.	Art. No	Compatibility
Banner Tray **BT-C1**	9967 – 0002 - 61	bizhub C250/P/C300/C350/C352/ P/C450
Consumables		
Toner TN210 K	8938 - 509	bizhub C250/P
Toner TN210 Y	8938 - 510	bizhub C250/P
Toner TN210 M	8938 - 511	bizhub C250/P
Toner TN210 C	8938 - 512	bizhub C250/P
Imaging Unit IU210 K	4062 - 203	bizhub C250/P
Imaging Unit IU210 Y	4062 - 303	bizhub C250/P
Imaging Unit IU210 M	4062 - 403	bizhub C250/P
Imaging Unit IU210 C	4062 - 503	bizhub C250/P
SK-602 Staple Cartridge for FS-514	14YK	FS-504
MS-2C (MAXX) Staple Cartridge for SD-503	4599 - 161	SK-1
Replacement Units		
Waste Toner Basket	4065 - 611	bizhub C250/P
Image Transfer Belt Unit [ITBU]	4038 – 0777 - 00	bizhub C250/P
Fusing Unit	4038- 0755- 00	bizhub C250/P

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Documentation

DOCUMENTATION	Language	Art. No.		Remarks
User Manual bizhub 252	GB	9961 – 0258 - 00	✓	User Manuals for **Printing, Scanning and User Box Utility** are part of the Copier User Manual. Those Manuals are available on CD in all languages which are available also for the Copier Manual. The CD's are part of the Copier Manual. In addition a User Manual for Enlarge Display Mode is included in the above mentioned CD, but only limited to three languages (GB, D, F). A multilingual Software CD (9968 – 0250 – 99) is also packed to the machines.
	D	9961 – 0258 - 01	✓	
	F	9961 – 0258 - 02	✓	
	E	9961 – 0258 - 03	✓	
	I	9961 – 0258 - 04	✓	
	P	9961 – 0258 - 05	✓	
	NL	9961 – 0258 - 06	✓	
	DK	9961 – 0258 - 07	✓	
	S	9961 – 0258 - 08	✓	
	N	9961 – 0258 - 09	✓	
	FIN	9961 – 0258 - 10	✓	
	GR	9961 – 0258 - 11	✓	
	TR	9961 – 0258 – 13	✓	
	CZ	9961 – 0258 – 15	✓	
	BG		---	
	EST		---	
	H	9961 – 0252 – 18	✓	
	LV		---	
	LT		---	
	PL	9961 – 0252 – 21	✓	
	RO		---	
	RUS	9961 – 0252 – 23	✓	
	SK	9961 – 0252 - 24	✓	
	UA		---	
	SLO		---	

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

DOCUMENTATION	Language	Art. No.		Remarks
User Manual bizhub C252P	GB	9961 – 0259 - 00	✓	A multilingual Software CD (9968 – 0250 – 99) is also packed to the machine.
	D	9961 – 0259 - 01	✓	
	F	9961 – 0259 - 02	✓	
	E	9961 – 0259 - 03	✓	
	I	9961 – 0259 - 04	✓	
	P		---	
	NL		---	
	DK		---	
	S		---	
	N		---	
	FIN		---	
	GR		---	
	TR		---	
	CZ		---	
	BG		---	
	EST		---	
	H		---	
	LV		---	
	LT		---	
	PL		---	
	RO		---	
	RUS		---	
	SK		---	
	UA		---	
	SLO		---	

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

DOCUMENTATION	Language	Art. No.		Remarks
Face Sheets / Labels bizhub C252	GB	9969 – 0420 - 00	✓	Same as for bizhub C250/C300/C351/C352/C450
	D	9969 – 0420 - 01	✓	
	F	9969 – 0420 - 02	✓	
	E	9969 – 0420 - 03	✓	
	I	9969 – 0420 - 04	✓	
	P	9969 – 0420 - 05	✓	
	NL	9969 – 0420 - 06	✓	
	DK	9969 – 0420 - 07	✓	
	S	9969 – 0420 - 08	✓	
	N	9969 – 0420 - 09	✓	
	FIN	9969 – 0420 - 10	✓	
	GR	9969 – 0420 - 11	✓	
	TR	9969 – 0420 – 13	✓	
	CZ	9969 – 0420 – 15	✓	
	BG	---		
	EST	---		
	H	9969 – 0420 – 18	✓	
	LV	---		
	LT	---		
	PL	9969 – 0420 – 21	✓	
	RO	---	---	
	RUS	9969 – 0420 – 23	✓	
	SK	9969 – 0420 – 24	✓	
	SLO	---		
Service Manual bizhub C252/P	GB		✓	Service Manual Machine & Options on CD

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

DOCUMENTATION	Language	Art. No.		Remarks
Operator's Manual Fax Kit FK-502	GB	9968 – 0503 - 99	✓	All marked languages are on one CD, which will be distributed with every fax kit.
	D		✓	
	F		✓	
	E		✓	
	I		✓	
	P		✓	
	NL		✓	
	DK		✓	
	S		✓	
	N		✓	
	FIN		✓	
	GR		✓	
	TR		✓	
	CZ		✓	
	BG		---	
	EST		---	
	H		✓	
	LV		---	
	LT		---	
	PL		✓	
	RO		---	
	RUS		✓	
	SK		✓	
	UA		---	
	SLO		---	

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Installation

Outline of the installation procedure

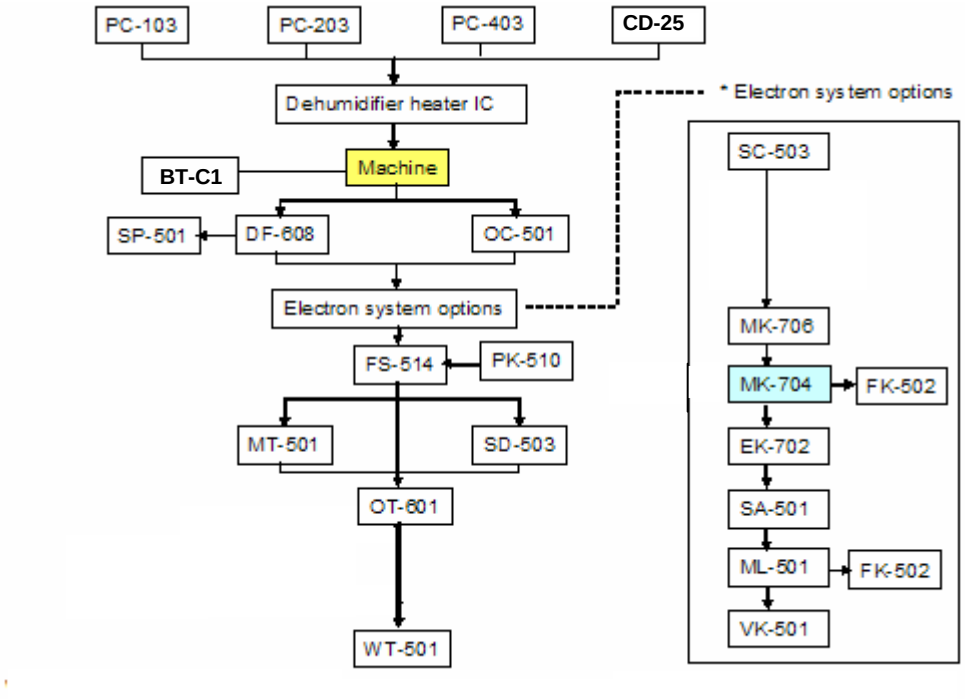

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

C252 detailed installation time

Main unit and optional Trays

C252 & Trays	Main unit	PC-403	PC-202	PC-103	CD-25
Unpacking	00:01:52	00:01:03	00:01:03	00:01:03	00:01:03
Setup	00:17:39	00:08:17	00:08:17	00:08:17	00:05:00
Adjustment	00:26:24	00:03:34	00:03:34	00:03:34	00:00:00
Total	0:45:55	0:12:54	0:12:54	0:12:54	0:06:03

Finisher and Finisher Options

Finisher	FS-514	SD-503	MT-501	OT-601	PK-510
Unpacking	00:04:35	00:00:58			00:00:45
Setup	00:15:45	00:16:15			00:07:57
Adjustment	00:02:00	00:20:15			00:13:54
Subtotal	0:22:20	0:37:28	0:00:00	0:00:00	0:22:36
Total	1:22:24				

Others

Others	MK-706	MK-704	FK-502	DF-601	D-Heater
Unpacking	00:00:30	00:00:30	00:01:00	00:01:00	00:01:30
Setup	00:24:45	00:25:51	00:02:35	00:15:49	00:28:00
Adjustment	-	-	-	00:09:59	-
Total	0:25:15	0:26:21	0:03:35	0:26:48	0:29:30

Definition of the installation time

Installation time is defined by total time of the following four items.
Installation time is defined as one person did.
In case of carrying device that more than one person is needed, define as one person did.

Category	Job to do
Unpacking	Time for unpack the carton box, and take the device out.
Setting-up	Time for removing packing materials such as fixing blackest/Tape till making first copy. In case of option, removing packing materials till attach to main body.
Adjustment/Setting	Adjustment and Setting advised on the Install Manual. e.g. - Serial Number input - Gradation Adjust - Date/Time - Paper alignment
Discarding packing materials	Separate packing materials, collect them to make ready for discarding

* Travel Time, Carrying machine into the customer premises, placing, connect to Network and product introduction to the customer is not included.

Maintenance

Firmware Updating procedure

1. Firmware Updating is done by CF card that rewriting the RAM on the PW Board. CF card is available as a spare part. This CF card can be rewritable when newer firmware is released. For rewriting, KM CF-Card writing utility is needed to do it.

   Note: See Service Manual about the updating procedure.

2. Internet ISW for updating the firmware at remote location. See the service manual.

Skew adjustment chart bundled with DF



Test chart for adjusting original reading position

* The above-mentioned service tool can be ordered as a spare part.
* Refer to details to the service manual.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Panel tools for printer version

When the service function of C252P is used, the following treatment devices are needed.

Name	Purpose/Recommendation	Note
Notebook PC	OS Win98/2000/XP Serial Port needed	On the market
Simulation software	For Setting, Adjusting and Verifying via PC display.	Download from CSES
Straight Cable	Connect between PC and Selector Port C	On the market
Selector	Connect among PC + Printer + X-Rite （Aluminium Tape required）	On the market
X-Rite	For verifying colour density	On the market
Cross Cable(For DTP32)	Connect between Selector and X-Rite	On the market
Cross Cable	Connect between Selector port A and Printer	On the market

Note: Tools already available for C250P, C450P or C352P are compatible and can be used.
Simulation Software can be used only from C250P.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Service Support Tools

CSRC

- CS Remote Care: System that acquires data of machines at remote locations. Following data can be sent from device to center host server.

  - Urgent notification (Error code, JAM, toner empty, periodical check)
  - Machine management data collection
  - Application
  -
    - ✧ Basic meter reading, Jam counter, Trouble counter, Warning counter
    - ✧ Parts Life counter
    - ✧ Firmware version

- Status of introduction and usage of CSRC in the Sales HQs, ask directly to the person in charge in the HQs.

Device Side		**C252**
Function	**Interface**	Support
CS Remote Care	RS-232C (modem)	**Supported**
	NIC on body (e-mail)	**Supported**
	NIC on IP controller (e-mail)	**Supported**
	FAX Line	**???**

CS Remote Care Application Side

Web Application		**Supported**
Local Application	Maintenance Tool	**Supported**
	Meter Reading Tool	**???**
	Parts Life MNG Tool	**???**

CSRC Host information data for C252 will be released in the same time of releasing main unit.

Preventive Maintenance Parts

Main body

Section	Maintenance parts	Life Time	Stop Time	A/N P/N
Tray 1	Feed Roller	200 K	Refer to the parts life concept	4034 3012 xx
	Separation Roller Assy	200 K		4034 0151 xx
Bypass	Feed Roller	200 K		4034 3001xx
	Separation Roller	200 K		4034 0151 xx
Tray 2	Feed Roller	300 K		4034 3005 xx
	Separation Roller Assy	300 K		4034 0151 xx
	Pick-up Roller	300 K		4034 3005 xx
Conveyance section	2nd Transfer Roller UNit	120 K		40138 0776 00 (*)
	Dust Filter / Vertical Conveyance section	120 K		* **Packed in the Transfer Kit**
Fusing section	Fusing Unit	120K		4038 0755 00
	Deodorant Filter	20K		
Processing section	Image Unit C/M/Y	45 K		Refer to Article Numbers
	Image Unit K	70 K		Refer to Article Numbers
	Ozone Filter	120 K		* **Packed in the Transfer Kit**
	Toner Cartridge Y/M/C	12 K		Refer to Article Numbers
	Toner Cartridge K	20 K		Refer to Article Numbers
Image Transfer section	Dust Filter / Cooling Fan	32 K		**Packed with the Waste Toner Box**
	Image Transfer Belt Unit (Kit)	120 K		4038 0777 00
	Waste Toner Basket	120 K		4065 611

*** Transfer Kit - Note: Image Transfer Belt Unit (ITBU) Kit with Dust Filter / Ozone Filter / 2nd Image Transfer Roller Unit**

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

PC-103/203/403

Maintenance parts	Life Time	Qty	P/N
Pick-up Roller	300 K	1	4030 3005 xx
Paper Feed Roller	300 K	1	4030 3005 xx
Separation Roller Assy	300 K	1	4030 0151 xx

DF-601

Maintenance parts	Life Time	Qty	P/N
Pick-up Roller	200 K	1	4582 3022 xx
Feed Roller	200 K	1	4582 3014 xx
Separation Roller	200 K	1	4582 3047 xx

Concept of parts life

	Description	Life value (Specification value)	Max. number of printed pages
Waste Toner Bottle	A waste toner full condition is detected when about 2,500 printed pages have been produced after a waste toner near full condition has been detected.	–	30 K *1,2
Fusing unit	The number of copies made is counted. (The counter counts up 2 for paper whose sub scan direction exceeds 216 mm.) The number of copies made is compared with the value of the number of hours through which the Fusing Drive Motor has turned translated to a corresponding value of the number of copies made and the value, whichever reaches the life specification value, is detected. When the maximum number of printed pages is reached, the print is inhibited.	120 K	150 K *3

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Transfer Belt Unit	The number of copies made is counted. (The counter counts up 2 for paper whose sub scan direction exceeds 216 mm.) The number of copies made is compared with the value of the number of hours through which the belt has turned translated to a corresponding value of the number of copies made and the value, which-ever reaches the life specifications value, is detected. (However the maximum number of copies is detected by counting hours through which the belt has turned.) When the maximum number of printed pages is reached, the print is inhibited.	120 K	151,037 *3
Imaging Unit C/M/Y	The hours which the PC drum has turned is compared with the value of the number of hours through which the Imaging roller has turned translated to a corresponding value of hours and the value, which-ever reaches the life specification value, is detected. * The hours which the PC drum has turned is the value of the number of distance through which the PC drum has run translated to a corresponding value of the number of hours and the value.	6,366 M *4	6,649 M *4
Imaging Unit /K		6,637 M *4	6,827 M *4

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Recommended Spare Parts

Engine

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
FUSING UNIT (220-240V)	4038-0755-00	1	5	
TRANSFER KIT	4038-0777-00	1	5	
BOTTLE ASSY	4065-611	1	25	
ROLLER ASSY	4030-0151-01	1	5	bizhubC450
ROLLER	4030-3005-01	2	5	bizhubC450
ROLLER ASSY	4034-0151-01	1	5	bizhub 180/210
ROLLER ASSY	4034-0151-01	1	5	bizhub 180/210
ROLLER	4034-3012-01	1	5	bizhub 180/210
ROLLER	4131-3001-01	1	5	bizhub 180/210
P/H ASSY	4038-0778-00	1	2	C250 comp.
PWB ASSY	4038-0101-05	1	2	C250 comp.
PWB ASSY	4038-0113-03	1	2	C250 comp.
PWB ASSY	4038-0115-01	1	2	C250 comp.
PWB ASSY	4038-0121-06	1	2	C250 comp.
PWB ASSY	4038-0123-03	1	2	C250 comp.
FIRST SLIDER ASSY	4038-0768-00	1	2	C250 comp.
CONTROL PANEL ASSY	4038-6053-02	1	2	C250 comp.
ROLLER ASSY	4038-0776-00	1	5	C250 comp.
HARD DISK DRIVE	4037-6095-01	1	2	bizhubC450
COMPACT FLASH	4038-0764-01	1	3	C250 comp.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Options

DF-601

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
Separator Pad	4582 3039 01	1	5	AFR-20
Roller	4582 3022 01	2	5	AFR-20
Roller	4582 3014 01	1	5	AFR-19
Roller	4582 3047 01	1	5	AFR-20
PWB Assy A	4582 6053 01	1	2	

PC-103, PC-203 PC-403

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
SEPARATOR ROLLER ASSY (PC-103, PC-203, PC-403)	4030 0151 01	1	10	PC-101/201, PF-124/210 / PF-122/PC-102/PC-202/PC-402
TAKE-UP ROLLER (PC-103, PC-203, PC-403)	4030 3005 01	1	20	PC-101/201, PF-124/210 / PF-122/PC-102/PC-202/PC-402
PWB ASSY (PWB-C2 PF) (PC-103, PC-203)	4348 0104 02	1	5	PC-101/201/PC-102/PC-202
PWB ASSY (PWB-C1 LCT) (PC-403)	4348 0101 05	1	5	PC-401/PF-122/PC-402

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

PK-501

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB Assy B	4583 4523 01	1	2	C250 comp.

AD-503

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB-A	4066 0101 01	1	2	C250 comp.

FK-502

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB FAX	15LA 9010	1	2	C250 comp.
PWB NCU 220 – 240 Volt	15LE9020	1	2	C250 comp.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Recommended Media

Paper	Manufacturer	Article Number
Konica Minolta Color +	Mondi 90 g/ m² A4	9966 – 1310 - 00
Konica Minolta Color +	Mondi 90 g/ m² A3	9966 – 1300 - 00
Konica Minolta Original	Mondi Triotec 80 g/m² A4	9960 – 6120 - 00
Konica Minolta Original	Mondi Triotec 80 g/m² A3	9960 – 6121 - 00
Color Copy	Mondi 100/120/160/200/220/ 250 g/m² A4/A3/A3+	---
Color Copy Style	Mondi 100/160/200 g/m² A4/A3	---
OHP Films		
CG-3700	3M	9967 – 0000 - 11
For more details please refer to the InfoHub “Recommended Copy / Print Media for Konica Minolta Digital Systems”.		

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Appendix

Differences from bizhub C250	
1.	New, compact built-in finisher (option)
2.	Size-detecting function in multiple bypass tray
3.	Annotation function (depends on C250 firmware update status)
4.	Scanner supports Windows Server 2003
5.	Scan Accelerator Kit (option)
6.	Reprinting scanned data stored in Box (option)
7.	Automatic job data deletion
8.	Authentication error lock
9.	Copy protection
10.	Encrypt PDF
11.	Encrypting data on HDD (option)
12.	PDF direct print
13.	Print status notifier
14.	Extra long paper printing including multiple prints
15.	Sheet insertion between pages (option)
16.	Chapter breaks (option)
17.	Special settings for designated pages (option)
18.	Memory copy
19.	Multi-page enlargement for copying
20.	Multi-port (option)
21.	Internet fax (option)
22.	IP Address fax with colour fax (option)
23.	Fax forwarding function to e-mail (option)
24.	Restored fax transmission (option)

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Differences from bizhub C250 cont..	
25.	Relay fax transmission (option)
26.	PC-fax reception with simultaneous box storage and printing function (option)
27.	TSI Routing fax forwarding to SMB, FTP and e-mail with simultaneous printing function (option)
28.	Automatic fax destination verification (option)
29.	Fax destination confirmation display (option)
30.	LCD basic screen available (type 1 or type 2)
31.	HDD backup utility
32.	Font management utility
33.	Web Jet Admin Plug-in

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Maximum paper capacity of FS-514 with different configurations				
	Total Capacity	**Non-Sort / Sort / Group**	**Sort Staple**	**Saddle Staple**
1st Tray	1200 sheets A4	200 sheets	200 sheets or 20 sets	
2nd Tray (A4 / B4 or A3)		1000 sheets	500 / 250 sheets or 50 / 25 sets	
1st Tray	900 sheets A4	200 sheets	200 sheets or 20 sets	
2nd Tray (A4 / B4 or A3)		500 / 250 sheets	500 / 250 sheets or 50 / 25 sets	
Additional Finisher Tray		200 sheets	200 sheets or 20 sets	
1st Tray	900 sheets A4	200 sheets	200 sheets or 20 sets	
2nd Tray (A4 / B4 or A3)		500 / 250 sheets	500 / 250 sheets or 50 / 25 sets	
Saddle Stitch Unit				200 sheets or 20 sets
1st Tray	800 sheets A4	200 sheets	200 sheets or 20 sets	
2nd Tray (A4 / B4 or A3)		200 / 100 sheets	200 / 100 or 20 / 10 sets	
Additional Finisher Tray		200 sheets	200 sheets or 20 sets	
Saddle Stitch Unit				200 sheets or 20 sets
1st Tray	1200 sheets A4	200 sheets	200 sheets or 20 sets	
2nd Tray (A4 / B4 or A3)		500 / 250 sheets	500 / 250 sheets or 50 / 25 sets	
Mail Bin Tray		500 sheets		
1st Tray	1100 sheets A4	200 sheets	200 sheets or 20 sets	
2nd Tray (A4 / B4 or A3)		200 / 100 sheets	200 / 100 sheets or 20 / 10 sets	
Additional Finisher Tray		200 sheets	200 sheets or 20 sets	
Mail Bin Tray		500 sheets		

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Finishing Matrix for FS-514					
	FS-514	**Mail Bin Tray**	**Punching**	**Stapling**	**Fold / Saddle Stitch**
FS-514		Yes	Yes	Yes	Yes
Mail Bin Tray	Yes		Yes	**No**	**No**
Punching	Yes	Yes		Yes	Yes
Stapling	Yes	**No**	Yes		Yes
Fold / Saddle Stitch	Yes	**No**	Yes	Yes	

Combination of Finishing Options					
	FS-514	**MT-501**	**SD-503**	**OT-601**	**PK-510**
FS-514		Yes	Yes	Yes	Yes
MT-501	Yes		**No**	Yes	Yes
SD-503	Yes	**No**		Yes	Yes
OT-601	Yes	Yes	Yes		Yes
PK-510	Yes	Yes	Yes	Yes	

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Paper Weights			
bizhub C252/P	**Option / Feature**	**60 ~ 90 g/m²**	**60 ~ 256 g/m²**
	MPT (machine)	Yes	Yes
	2nd cassette (machine)	Yes	No
	PC-103	Yes	No
	PC-203	Yes	No
	PC-403	Yes	No
	Manual Feed	Yes	Yes
	Duplex	Yes	Yes
FS-514	1st Tray	Yes	Yes
	2nd Tray	Yes	Yes
	Additional Tray	Yes	No
	Mail Bin	Yes	No
Finishing Functionality	Stapling	Yes	No
	Punching	Yes (up to 130 g/m²)	No
	Folding	Yes	No

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Utilities	
PageScope WebConnection	Resident on MFP – Internet Browser based status control and admin setting (Java based)
PageScope NetCare	Network based status control of all connected MFP's (including competitor models)
PageScope Network Setup	Network based admin setup tool. Same functionality as admin area of WebConnection.
PageScope Data Administrator	Network based utility to setup EKC, User Authentication and Scan Destination.
PageScope Box Operator	Client software for user box access and file download.
PageScope Job Spooler	Overview of job queue/cancel/prioritise. Restart of box jobs and setting change.
HDD Backup Utility	Storing data of HDD to a local file.
Font Management Utility	Displaying the machine's resident fonts.
PageScope Direct Print	Processing print files directly to the MFP.
Print Status Notifier	Notifying the user when print job has been completed.
NDPS Gateway	Gateway to interact seamless with Netware environments.
EMS-Plug-ins	Plug-ins to integrate Konica Minolta devises into Enterprise Management Systems.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

Utilities cont…	
Copy Protection Utility	To manage the machine-resident copy protection patterns.
PageScope Workware (Demo Version)	Document Management Software

What is delivered with the machine?	
Parts	
Imaging Unit (incl. PC-drum & Starter)	Yes (4 units)
Toner	No
Document Feeder	No
Original Cover	No
Copy Tray	N/A
Operator Manual	Yes
Face Sheets	Yes
Setup Guide	Yes
Additional Manual CD	Yes
Controller Driver + Software CD	Yes